



# Suzuki GSXR 1000 K4 replace battery

Installation of the battery after the winter break.

Written By: Bianca Ciesielska





## TOOLS:

- PH3 screwdriver, wrench or socket wrench size 10 and a hexagonal socket wrench size. 4 (1)
-




## Step 1 — Drums



- Suzuki GSXR 1000 K4

## Step 2

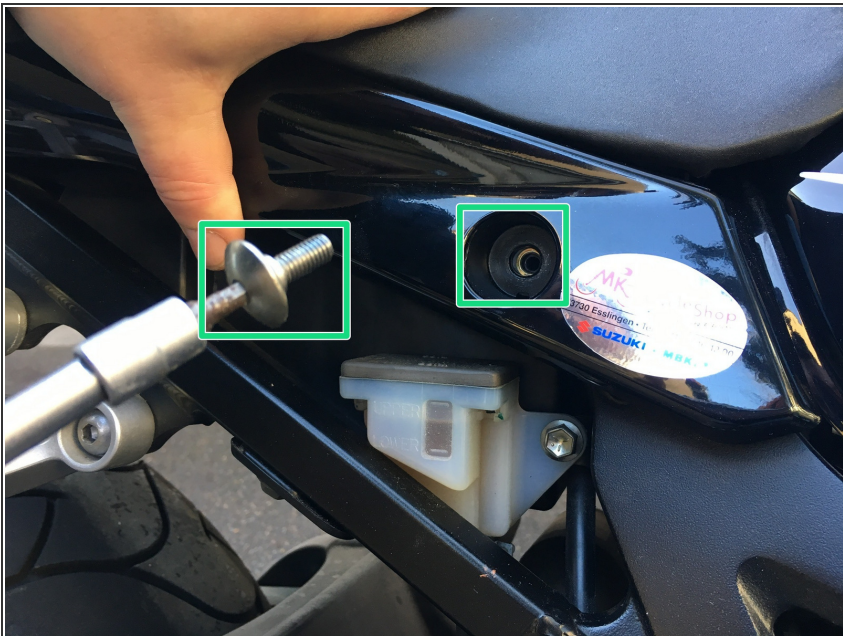

- First you need to remove on the left and right side of the seat the screws with an Allen key (Gr. 4).




### Step 3





- The seat can now be completely removed.

### Step 4

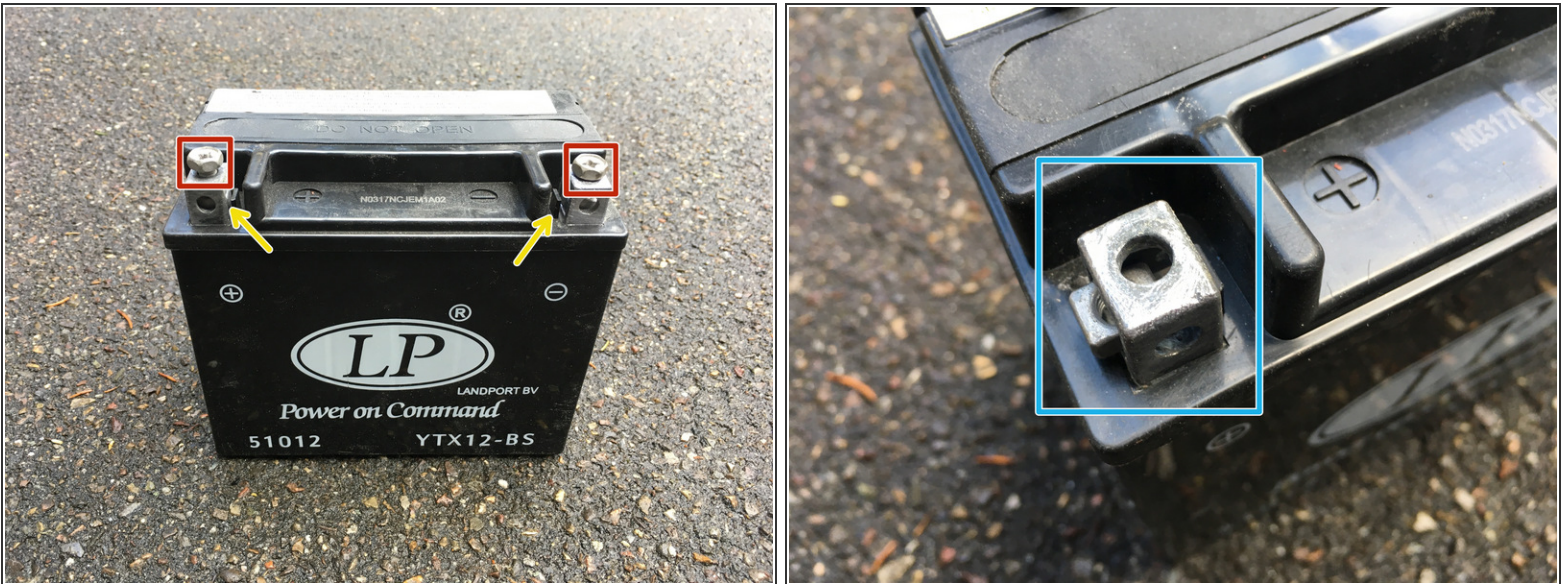

- On the battery the screws can now use a screwdriver PH 3 (alternatively, an open-end wrench or socket wrench Gr. 10 may be used) are removed.
- Attention! Among the bolts are nuts. These are not fixed, so the screw must be taken when removing the nuts will not get lost.
- Before installing both battery poles should be treated with terminal grease or Polspray. Overloading can lead to corrosion, which can lead to contact problems.


## Step 5

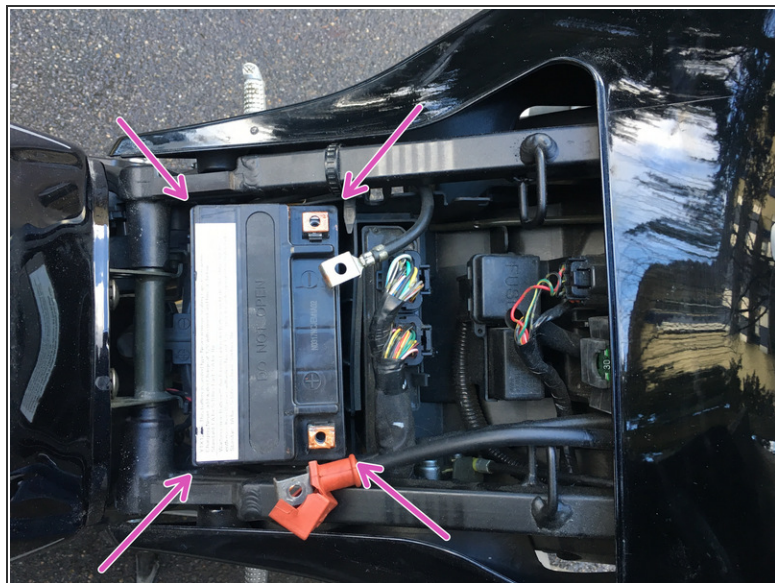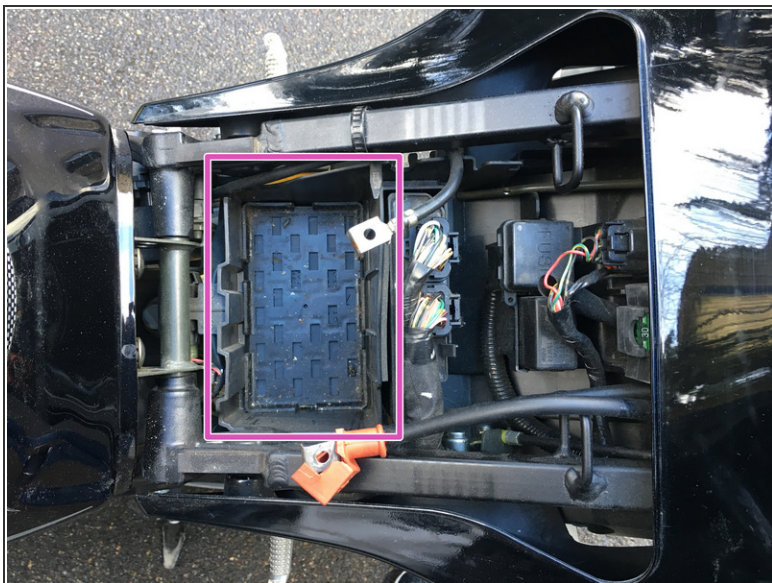

- The battery can now be inserted into the battery compartment.



## Step 6

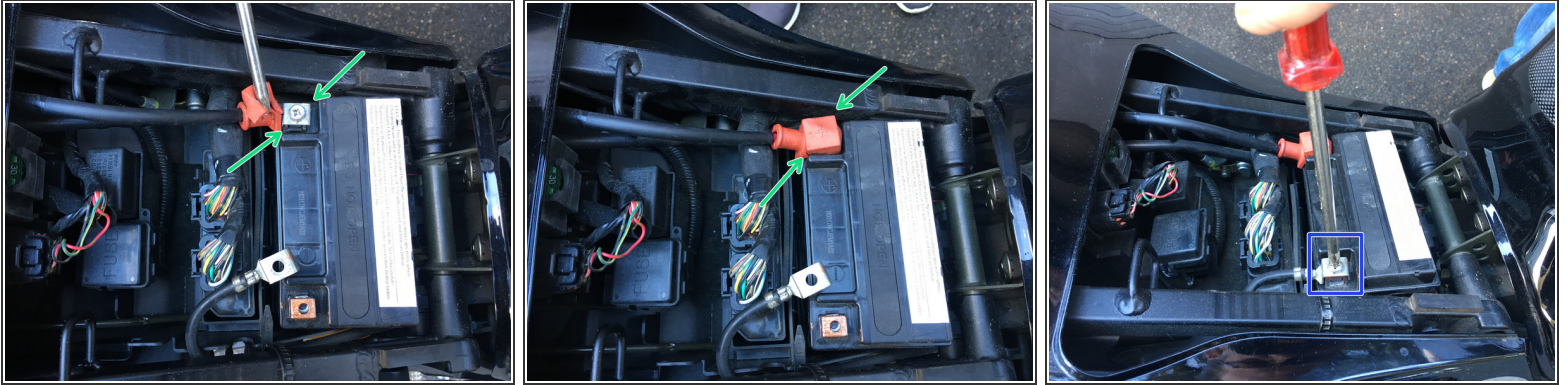

- ⚠ Before the battery can be reconnected must be abgeschaltet all current consumers (lighting, ignition, etc.).
- ⚠ To prevent a short circuit or other damage to the motorcycle, make sure that the **positive terminal** must be connected **first** !!!!!
- After the positive pole is fixed combination should be protected with the appropriate cover. If the cover is damaged, it must be necessarily replaced. This protection is a relevant criterion for the TÜV.
- After the positive pole is secured and protected, the negative pole can be fixed.

Arbeite die Schritte in umgekehrter Reihenfolge ab, um dein Sitz wieder zusammenzubauen.

Das Motorrad ist dann wieder startklar ;)

This document was last generated on 2017-07-02 03:55:37 PM.